



Configure you router (Linksys router shown but similar to all brands)

1. Plug LAN cable into any of the ports on the right
2. DO NOT use the "internet" port (put a piece of tape over it)
3. Take your computer, disconnect it from the network and plug it directly into the Router. Make sure the Router is turned on and there is a link light on.
4. Plug the workstation into any the 4 ports. (See arrow 1)
5. Open a browser and access the Router's web based utility at <http://192.168.1.1>.

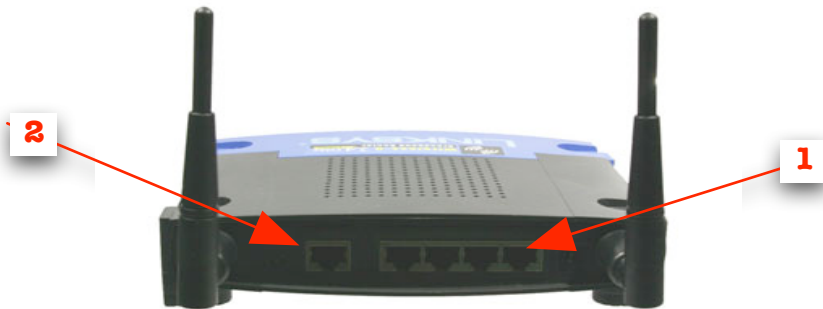

6. You will be prompted for a User Name and Password. By default there is no User Name and the Password is admin.
7. The first page is the "Setup/Basic Setup" page. (See figure below)
8. Scroll down and click "Disable" next to DHCP server
9. Click Save Settings"
10. Restart and you can plug in as many computers as you have

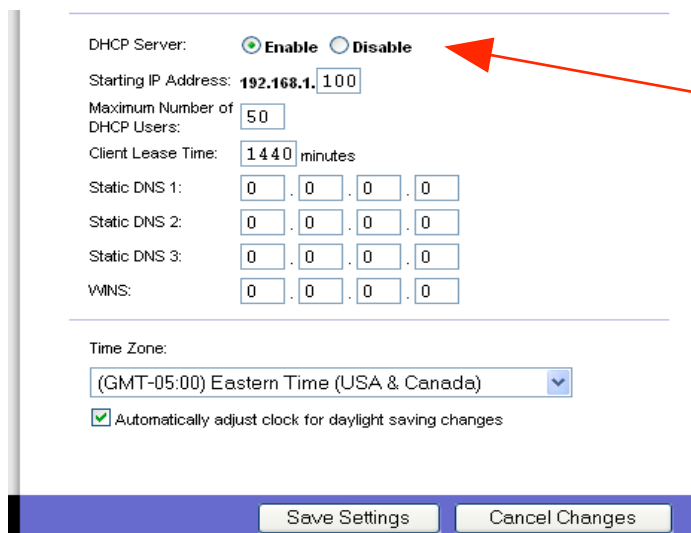

DHCP Server: Enable Disable

Starting IP Address: 192.168.1.100

Maximum Number of DHCP Users: 50

Client Lease Time: 1440 minutes

Static DNS 1: 0 . 0 . 0 . 0

Static DNS 2: 0 . 0 . 0 . 0

Static DNS 3: 0 . 0 . 0 . 0

WINS: 0 . 0 . 0 . 0

Time Zone:
(GMT-05:00) Eastern Time (USA & Canada)

Automatically adjust clock for daylight saving changes

Save Settings Cancel Changes

11. Call the HelpDesk x7224 with any questions